


GENIUS15G

NAVIOP offers a wide range of products that can be used stand-alone, to make limited checks or to show small size boats' data, or that can be included within wider configurations for complete control and monitoring systems.

Please contact our official dealer for your Country to choose the most suitable configuration for your project

GENIUS15G display

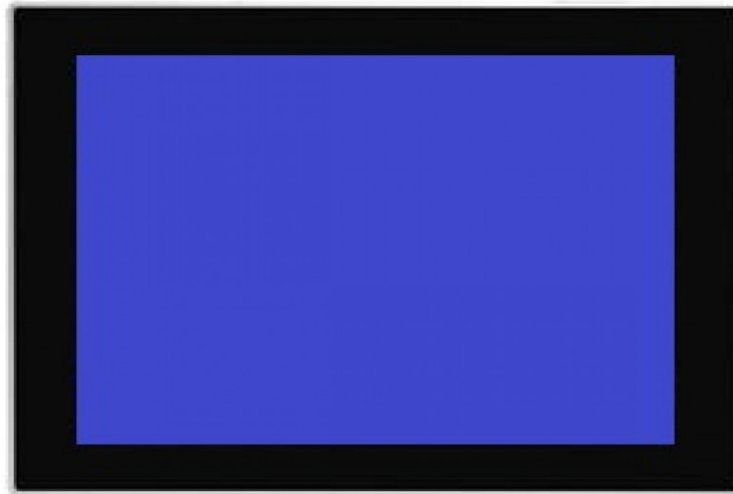

GENIUS15G operating panel combines state-of-the-art features and top performance with an outstanding design. It is the ideal choice for HMI applications in marine environments.

GENIUS15G features a wide 15" TFT high brightness glass display with LED backlight and full vector graphic capabilities. Designed for harsh environments, the new display has a true glass touch screen with Anti-Reflective glass surface treatment. This durable touchscreen guarantees high brightness and very high contrast, therefore it is perfect in unfavourable conditions and in marine environments.

More than 150 communication drivers and multilanguage applications management .

Vector graphics capabilities with native support of SVG graphic objects and transparency management.

Remote monitoring and control. Client-Server functionality.

Optional plug-in modules for fieldbus systems, networks I/O and controllers.

Alarms and alarm history list. Alarm and alarm history list can be printed or transferred to an host computer.

Available features:

- High Brightness 15" TFT glass colour display, LED backlight
- 1024 x 768 pixel (XGA) resolution, 64K colours
- 256 Mbyte Flash Disk
- 256 Mbyte DDR
- Projective Capacitive touchscreen
- 2 x Ethernet interface with switch function
- 2 x USB Host port
- Connection to bus systems using optional plug-in modules
- Slim design. Mounting depth less than 60mm

Official Dealer:
 NAVIOP S.r.l.
 via Ferrante Foschi, 55
 47121 Forlì (FC) – Italy
 Ph. +39 0543 774229
 Mob. +39 335 7483676
 service@naviop.com
 www.naviop.com

GENIUS15G

NAVIOP offers a wide range of products that can be used stand-alone, to make limited checks or to show small size boats' data, or that can be included within wider configurations for complete control and monitoring systems.

Please contact our official dealer for your Country to choose the most suitable configuration for your project

GENIUS15G display

Display

Type:	TFT
Resolution:	1024 x 768 XGA
Active display area:	15" diagonal
Colors:	64K
Backlight:	CCFL
Brightness:	1500 cd/mq typ.
Dimming:	Yes

Memory

User Memory:	256 MB flash
Memory Card:	SD card slot
RAM:	256 MB DDR

Front panel

Touch screen:	True glass Projective Capacitive
---------------	----------------------------------

Interfaces

Ethernet port:	2 10/100 Mbit with integrated
USB port:	2 Host interface (v. 2.0)
Serial port 1:	RS-232/422/485 configurable
Expansion slot:	2 Plugin slot Expansion

Functionality

Vector graphics:	Yes, includes SVG support
Multilanguage:	Yes, with runtime language switching
Multiple driver communication:	Yes
Data acquisition and trends:	Yes. Flash memory storage.
Recipe memory:	Yes. Flash memory storage.
Users and passwords:	Yes
Alarms:	Yes
Event List:	Yes
Password:	Yes
Hardware RTC:	Yes, with battery back-up
Screen saver:	Yes
Buzzer:	Yes, audible feedback for touchscreen

Ratings

Power supply voltage:	24 Vdc (9 ÷ 30 Vdc)
Current consumption:	2.0 A (@24 Vdc max.)
Fuses Number:	Automatic
Battery:	Rechargeable Lithium battery, not user-replaceable

Environmental conditions

Operational temperature:	-20 ÷ 60 °C (vertical installation)
Storage temperature:	-40 ÷ 85 °C
Operative and storage humidity (RH%):	5 ÷ 85% relative humidity, non-condensing
Protection class:	IP69K (front panel), IP20 (rear)

Dimensions

Faceplate:	392 x 307 mm (15.43 x 12.08 ")
Cutout:	381 x 296 mm (15 x 11.62 ")
Weight:	Approx. 4.0 Kg
Mounting depth :	56 + 8.5 mm (2.20 + 0.33 ")

Approvals

CE:	Emission EN 61000-6-4, Immunity EN 61000-6-2 for installation in industrial environments
DNV:	Type Approval Certificate (pending approval)

Official Dealer:
NAVIOP S.r.l.
via Ferrante Foschi, 55
47121 Forlì (FC) – Italy
Ph. +39 0543 774229
Mob. +39 335 7483676
service@naviop.com
www.naviop.com